




BEVLEX® 500 SERIES

flexible tube

EXTREMELY FLEXIBLE DUO DUROMETER TUBE

RECOMMENDED USE

Tube for draft beer transfer and soft drink applications.

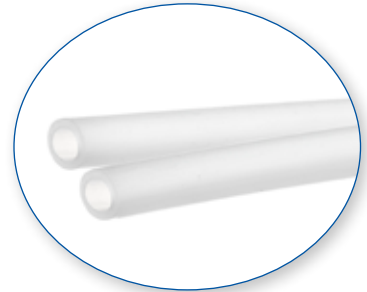

PRODUCT FEATURES AND CHARACTERISTICS

- Heavy walled construction, to resist crushing and kinking and provide ease of handling and routing;
- Lighter weight, up to 25% lighter weight than PVC;
- Meets FDA criteria, RoHS compliant, Reach SVHC compliant and is NSF 51 listed;
- No PVC, phthalates or other chemicals listed in California Prop 65. Reduces plastics odour and taste;
- Chemical Compatibility, excellent chemical resistance and no taste carryover when Standard Caustic Solution (2-3%) is utilised in line cleaning at the recommended temperatures of 27°-44°C;
- Stable fitting retention even after various temperature cycles;
- Available alternate colours, red and black colours are available on special order. Minimum quantities will apply.

AVAILABLE PRODUCTS

- 500-03125x100 Bevlex 500 TPE BT NB 3/16" x 7/16" Translucent NT 100'30,4mCB CS12.3mm
- 500-04125x100 Bevlex 500 TPE BT NB 1/4" x 1/2" Translucent NT 100'30,4mCB CS13.3mm
- 500-05125x100 Bevlex 500 TPE BT NB 5/16" x 9/16" Translucent NT 100'30,4mCB CS15.7mm
- 500-06125x100 Bevlex 500 TPE BT NB 3/8" x 5/8" Translucent NT 100'30,4mCB CS17.0mm

PRODUCTS SPECIFICATIONS

Article number	Nominal ID	Nominal OD	Nominal ID	Nominal OD	Working Pressure at 21°C	Working Pressure at 60°C	Weight per Package	Min. Bend Radius	Clamp Size	Standard Package	Standard Package	Package type
	inch	inch	mm	mm	bar	bar	kgs	mm	mm	ft	m	
500-03125x100	3/16"	7/16"	4,8	11,1	3,1	2,1	2,3	50,8	12,3	100	30,5	Boxed Coil
500-04125x100	1/4"	1/2"	6,35	12,7	2,4	1,7	2,7	76,2	13,3	100	30,5	Boxed Coil
500-05125x100	5/16"	9/16"	7,9	14,3	2,1	1,4	3,2	96,5	15,7	100	30,5	Boxed Coil
500-06125x100	3/8"	5/8"	9,5	15,9	1,7	1,0	3,6	114,3	17,0	100	30,5	Boxed Coil