



CLEARBRAID® K3150 SERIES

potable water hose


REINFORCED PVC BEVERAGE HOSE

RECOMMENDED USE

General beverage applications.

KEY FEATURES AND CHARACTERISTICS

- Crystal clear phthalate free PVC compound, in compliance with applicable FDA and NSF requirements;
- Excellent pressure performance and kink-resistance due to polyester yarn reinforcement;
- Smooth interior, stays clean and reduces pressure loss;
- Phthalate free hose with orange tracer yarn for easy identification.

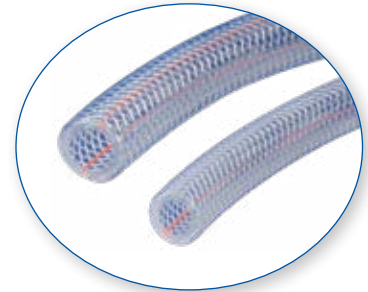

AVAILABLE PRODUCTS

K3150-03x300	Clearbraid K3150 PVC BH YB 3/16" x 3/8" Clear OT 300'91,4mC
K3150-04x300	Clearbraid K3150 PVC BH YB 1/4" x .438" Clear OT 300'91,4mC
K3150-05x300	Clearbraid K3150 PVC BH YB 5/16" x .531" Clear OT 300'91,4mC
K3150-06x300	Clearbraid K3150 PVC BH YB 3/8" x .594" Clear OT 300'91,4mC
K3150-08x300	Clearbraid K3150 PVC BH YB 1/2" x 3/4" Clear OT 300'91,4mC
K3150-10x200	Clearbraid K3150 PVC BH YB 5/8" x .891" Clear OT 200'61mC
K3150-12x200	Clearbraid K3150 PVC BH YB 3/4" x 1.031" Clear OT 200'61mC
K3150-16x200	Clearbraid K3150 PVC BH YB 1" x 1.300" Clear OT 200'61mC
K3150-20x100	Clearbraid K3150 PVC BH YB 1 1/4" x 1.620" Clear OT 100'30,5mC
K3150-24x100	Clearbraid K3150 PVC BH YB 1 1/2" x 1.938" Clear OT 100'30,5mC
K3150-32x100	Clearbraid K3150 PVC BH YB 2" x 2.490" Clear OT 100'30,5mC

PRODUCTS SPECIFICATIONS

Article number	Nominal ID inch	Nominal OD inch	Nominal ID mm	Nominal OD mm	Working Pressure at 21°C	Working Pressure at 50°C	Weight per Package	Min. Bend Radius	Standard Package	Standard Package	Package typ
	inch	inch	mm	mm	bar	Bar	kgs	mm	ft	m	
K3150-03x300	3/16	0.375	4.7	9.5	17.2	10.3	5.9	44.5	300	91.4	coil
K3150-04x300	1/4	0.438	6.4	11.1	17.2	10.3	7.7	50.8	300	91.4	coil
K3150-05x300	5/16	0.531	7.9	13.5	17.2	9.3	10.9	63.5	300	91.4	coil
K3150-06x300	3/8	0.594	9.5	15.1	15.5	8.6	12.3	76.2	300	91.4	coil
K3150-08x300	1/2	0.750	12.7	19.1	13.8	6.9	18.1	101.6	300	91.4	coil
K3150-10x200	5/8	0.891	15.9	22.6	13.8	6.9	15.9	127.0	200	61.0	coil
K3150-12x200	3/4	1.031	19.1	26.2	10.3	5.9	19.5	152.4	200	61.0	coil
K3150-16x200	1	1.300	25.4	33.0	8.6	5.2	26.8	203.2	200	61.0	coil
K3150-20x100	1 1/4	1.620	31.8	41.1	6.9	3.8	20.4	254.0	100	30.5	coil
K3150-24x100	1 1/2	1.938	38.1	49.2	6.9	3.4	29.0	304.8	100	30.5	coil
K3150-32x100	2	2.490	50.8	63.2	5.2	2.4	42.6	406.4	100	30.5	coil