



BEV-FLEX® 172 SERIES

polyester-reinforced polyethylene beverage hose


FLEXIBLE & REINFORCED

RECOMMENDED USE

Various drink applications.

PRODUCT FEATURES AND CHARACTERISTICS

- Polyester reinforced, Phthalate free hose using NSF-51/61 certified food-grade materials;
- More flexible as our 170 series due to the EVA cover.

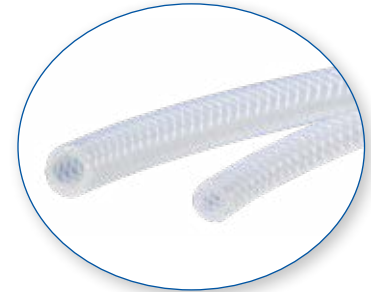

AVAILABLE PRODUCTS

172-04102-77	Bev-Flex 172 PE BH YB .265" x .457" White NT 100'30,5mCB CS12,3mm
172-04112-77	Bev-Flex 172 PE BH YB .265" x .457" White RT 100'30,5mCB CS12,3mm
172-04122-77	Bev-Flex 172 PE BH YB .265" x .457" White BT 100'30,5mCB CS12,3mm
172-04503-00	Bev-Flex 172 PE BH YB .265" x .420" White WT 500'152,4mSB CS11,3mm
172-06100-77	Bev-Flex 172 PE BH YB .380" x .593" White NT 100'30,5mCB CS15,7mm
172-06120-77	Bev-Flex 172 PE BH YB .380" x .593" White BT 100'30,5mCB CS15,7mm
172-06300-00	Bev-Flex 172 PE BH YB .380" x .593" White NT 300'91,4mSB CS15,7mm
172-06310-00	Bev-Flex 172 PE BH YB .380" x .593" White RT 300'91,4mSB CS15,7mm
172-06320-00	Bev-Flex 172 PE BH YB .380" x .593" White BT 300'91,4mS CS15,7mm
172-06520-00	Bev-Flex 172 PE BH YB .380" x .593" White BT 500'152,4mR CS15,7mm
172-08100-77	Bev-Flex 172 PE BH YB .510" x .740" White NT 100'30,4mCB CS19,8mm
172-08300-00	Bev-Flex 172 PE BH YB .510" x .940" White WT 300'91,4mS CS19,8mm

PRODUCTS SPECIFICATIONS

Article number	Nominal ID inch	Nominal OD inch	Nominal ID mm	Nominal OD mm	Working Pressure at 21°C	Working Pressure at 50°C	Weight per Package	Min. Bend Radius	Clamp Size	Standard Package	Standard Package	Package type
	inch	inch	mm	mm	bar	Bar	kgs	mm	mm	ft	m	
172-04102-77	0.265	0.457	6,7	11,6	17.2	8.6	2.8	27.9	12.3	100	30.5	Boxed coil
172-04112-77	0.265	0.457	6,7	11,6	17.2	8.6	2.8	27.9	12.3	100	30.5	Boxed coil
172-04122-77	0.265	0.457	6,7	11,6	17.2	8.6	2.8	27.9	12.3	100	30.5	Boxed coil
172-04502-00	0.265	0.457	6,7	11,6	17.2	8.6	11.4	27.9	12.3	500	152.4	Boxed spool
172-04503-00	0.265	0.420	6.7	10.7	17.2	8.6	11.4	31.8	11.3	500	152.4	Boxed spool
172-04512-00	0.265	0.457	6.7	11.6	17.2	8.6	11.4	27.9	12.3	500	152.4	Boxed spool
172-04522-00	0.380	0.593	9.7	15.1	17.2	8.6	11.4	44.5	15.7	500	152.4	Boxed spool
172-06100-77	0.380	0.593	9.7	15.1	13.8	6.9	3.7	44.5	15.7	100	30.5	Boxed coil
172-06120-77	0.380	0.593	9.7	15.1	13.8	6.9	3.7	44.5	15.7	100	30.5	Boxed coil
172-06300-00	0.380	0.593	9.7	15.1	13.8	6.9	10.4	44.5	15.7	300	91.4	Boxed spool
172-06310-00	0.380	0.593	9.7	15.1	13.8	6.9	10.4	44.5	15.7	300	91.4	Boxed spool
172-06320-00	0.380	0.593	9.7	15.1	13.8	6.9	10.4	44.5	15.7	300	91.4	Boxed spool
172-06520-00	0.380	0.593	9.7	15.1	13.8	6.9		44.5	15.7	500	152.4	Boxed spool
172-08100-77	0.510	0.740	13.0	18.8	13.8	6.9	4.8	76.2	19.8	100	30.5	Boxed coil
172-08300-00	0.510	0.740	13.0	18.8	13.8	6.9	12.2	76.2	19.8	300	91.4	Wrapped coil